

# Irrigation Scheduling

## Determining Distribution Uniformity

Loren Oki

Dept. of Plant Sciences and  
Dept. Human Ecology  
UC Davis

Doing More With Less  
Stockton, CA  
December 2, 2016

# Learning Objectives

- Measuring system performance
  - Conducting a system assessment
  - Checking for proper operation
  - Determine distribution uniformity
- Improving performance

# Key elements for landscape water conservation

- Plant selection and design
- Mulching
- Composting
- Fertilization
- Irrigation
  - System Audit
  - Scheduling
  - Management





# Conducting An Irrigation Audit

- Adapted from sprinkler systems
- Applicable to all types, including drip



# Conducting An Irrigation Audit

- Math is necessary
  - because we have to measure

“To measure is to know.” *Lord Kelvin*

“If you can't measure it, you can't improve it.” *Lord Kelvin*

“If it can't be expressed in figures, it is not science; it is opinion.”  
*Robert Heinlein*

# Conducting An Irrigation Audit

- Inspect the site
- Tune up the irrigation system
- Test the system
- Calculate performance
- Interpret the information

Credit: Irrigation Association  
Landscape Irrigation Auditor  
certification program

# Inspect the Site

- Locate the water meter
  - Learn and understand how to read it
- Locate and identify the controller type
  - Several manufacturers
  - MANY different models
  - Some are OLD
  - Learn to program it

# Inspect the Site

- Locate the valves
- Measure system pressure
  - Static and dynamic pressure
  - Close to source
  - Time of day matters



# Inspect the Site

- Landscape features and design
  - Plant materials within each zone
  - Microclimates
  - Hardscape features

# Inspect the Site

- Compacted soil
  - Reduces infiltration and percolation
- Soil Texture
  - Clay, Loam, and Sand
  - SoilWeb app\*
    - Phone and PC applications

<http://casoilresource.lawr.ucdavis.edu/gmap/>


# Inspect the Site

- Slopes
  - Runoff potential



# Inspect the Site

- Irrigation Zones
  - How many?
  - Zone locations
  - Associated valves

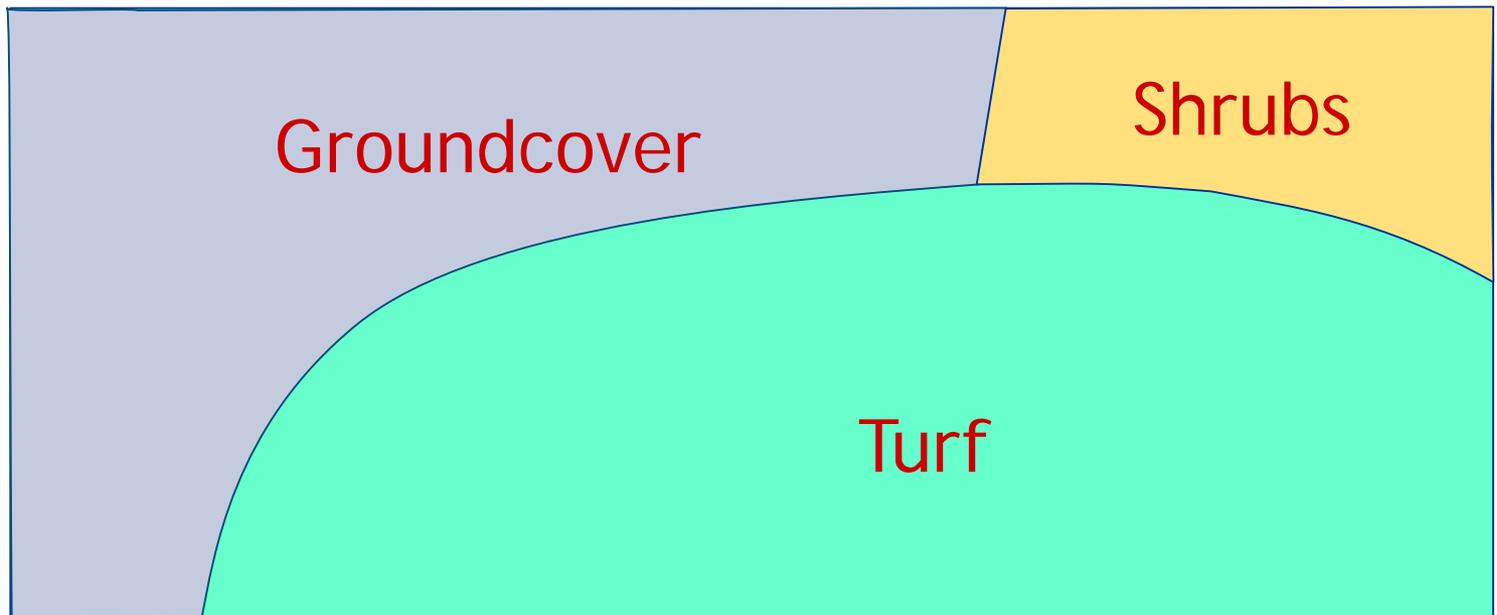

# Sprinklers and Emitters

- Locations
  - Mark with flags
- Types
  - Sprays, rotors, rotary stream, impact
  - Drip tube, point source (buttons) (and flow rate), bubblers, micro sprays



# Sprinkler Types

- Impact
- Sprays
- Rotary stream
- Gear drive rotor



# Flow Rates

- Know the flow rates for each sprinkler
- Obtain this from the manufacturer
- You'll need to know dynamic pressure!



# Flow Rates

- Calculate the total flow for each valve
- Multiply the flow per sprinkler times the number of sprinklers




# Flow Rates

- Compare the calculated total to the actual flow
- This can reveal leaks, plugs, or other issues.



# Maintenance

- Maintenance
  - Proper and timely

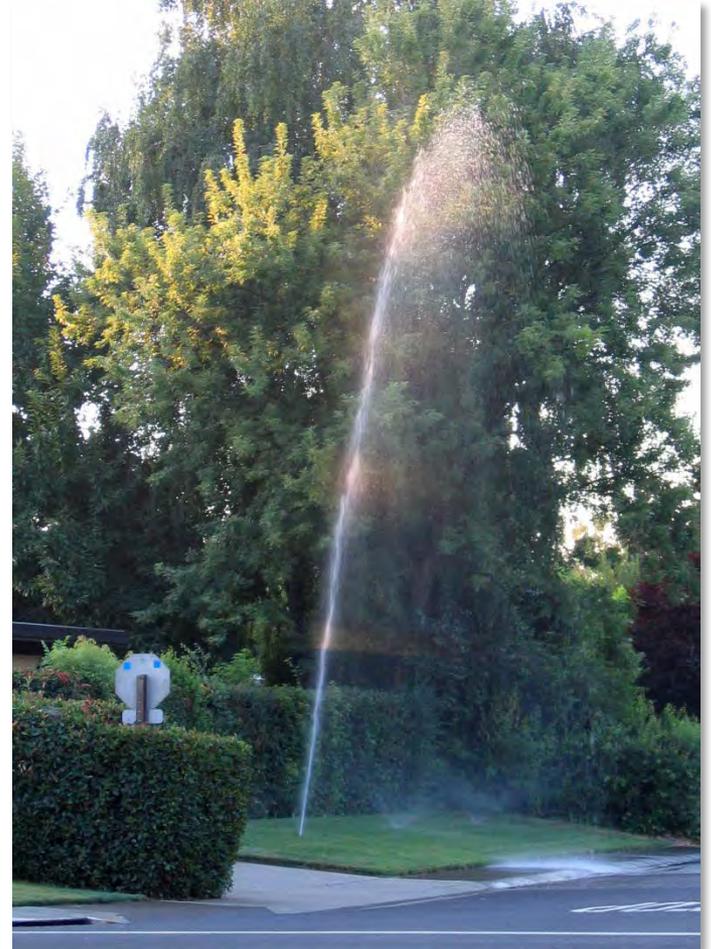

# Maintenance

- Maintenance
  - Proper and timely



# “Urban Drool”



# Tune-up the System

- Sprinkler/emitter condition
  - Spacing
  - Measure the distance between sprinklers
  - Verify head-to-head coverage



# Tune-up the System

- Sprinkler/emitter condition
  - Are sprinklers plumb?
  - Use bubble level
  - Check for tilt



# Tune-up the System

- Sprinkler/emitter condition
  - Determine the dynamic pressure



# Tune-up the System

- Sprinkler/emitter condition
  - Determine the dynamic pressure



# Test the System

- Catch can test
  - Measures how fast water is applied
  - How evenly it is applied
- What is needed
  - Catch cans
  - Graduated cylinder



# Test the System

- Set catch cans
  - At and in between sprinklers
  - At emitters
  - Regular and even spacing



# Test the System

- Set catch cans
  - At and in between sprinklers
  - At emitters
  - Regular and even spacing
- Minimum number of catch cans=24
  - Multiples of 4
- Wind less than 5 mph

# Test the System

- Turn on the valve
  - Duration 10-20 minutes
  - Optimal volume (in mL) is  $1\frac{1}{2}$  times the area of the opening (in sq.in.)
  - If there are several valves for an area, use the same duration for each
  - Observe runoff and when it occurs

# Test the System

- Check for proper operation
- Deflections



# Test the System

- Check for proper arc (pattern)
- and radius (distance)



# Test the System

- Measure the water in each container



Photo: B. Baker

# Using the Catch Can Data

- Distribution Uniformity (DU)
  - How evenly a sprinkler system applies water
  - Typical response to a dry spot:  
**INCREASE RUN TIME**

# Using the Catch Can Data

- Distribution Uniformity (DU)
  - How evenly a sprinkler system applies water
  - Effect on run time

| DU% | min/wk |                |
|-----|--------|----------------|
| 58  | 131    |                |
| 80  | 95     | =15% reduction |


# Distribution Uniformity

- DU=Excellent
- Duration: Replace ET




# Distribution Uniformity

- DU=Excellent
- Duration: Too long

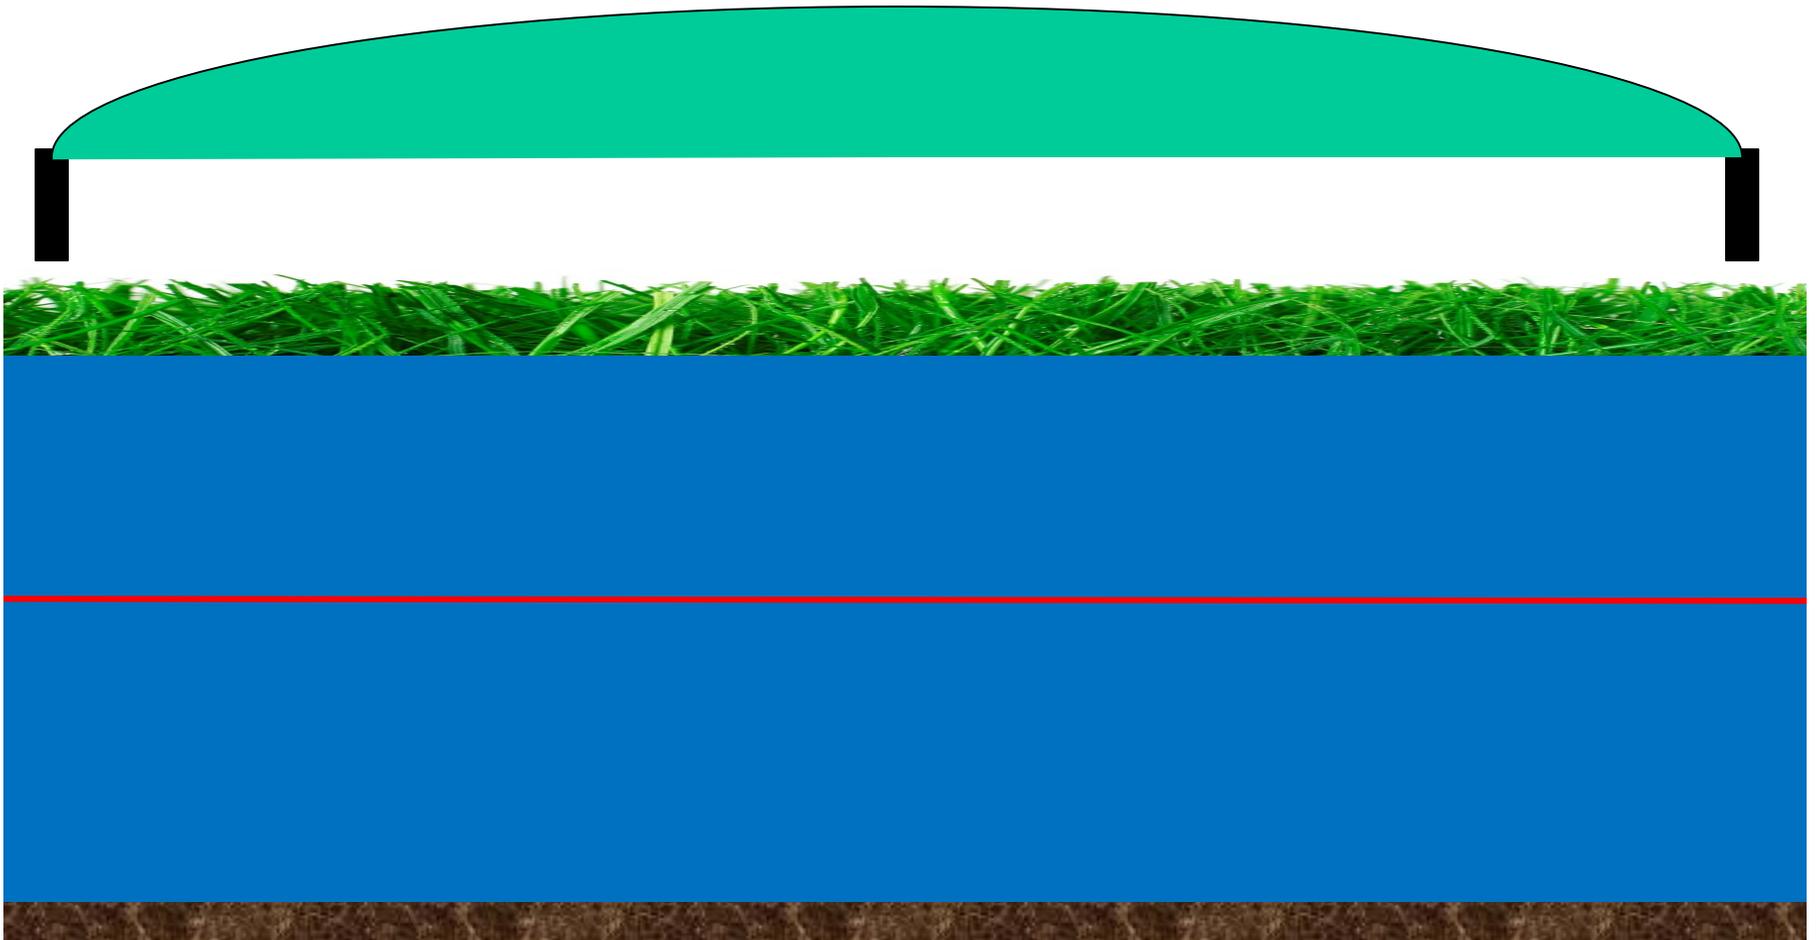


# Distribution Uniformity

- DU=Excellent
- Duration: Too short

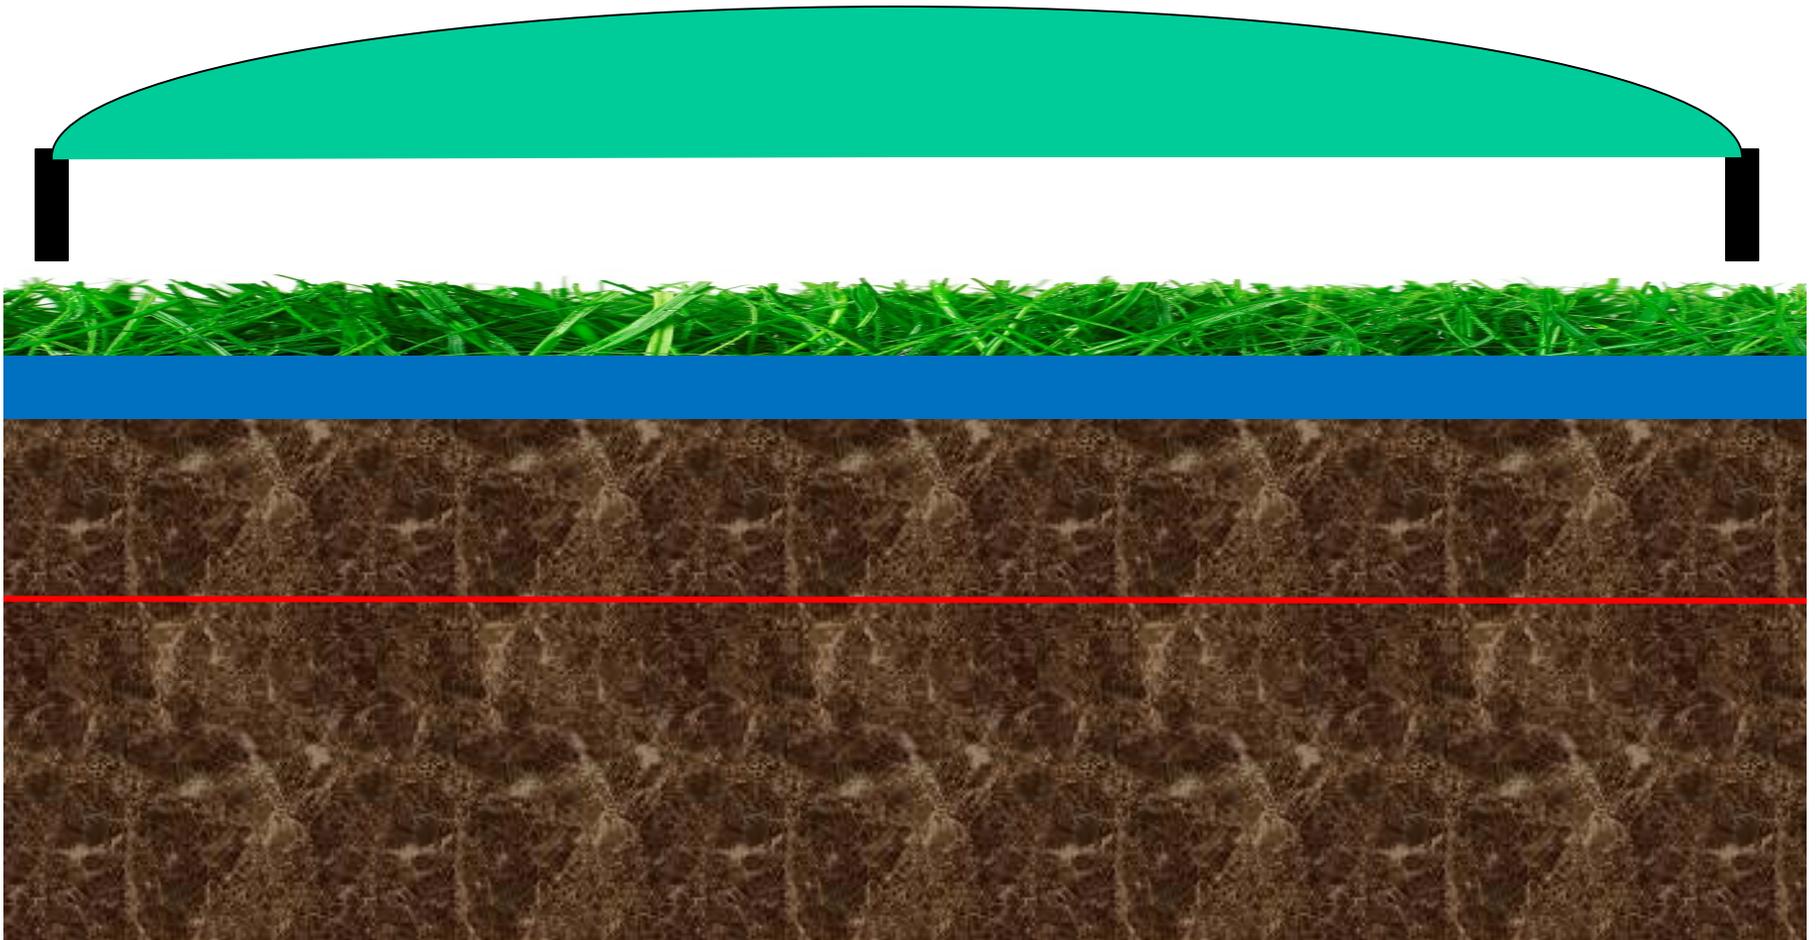


# Distribution Uniformity

- DU=Poor
- Duration: Too short

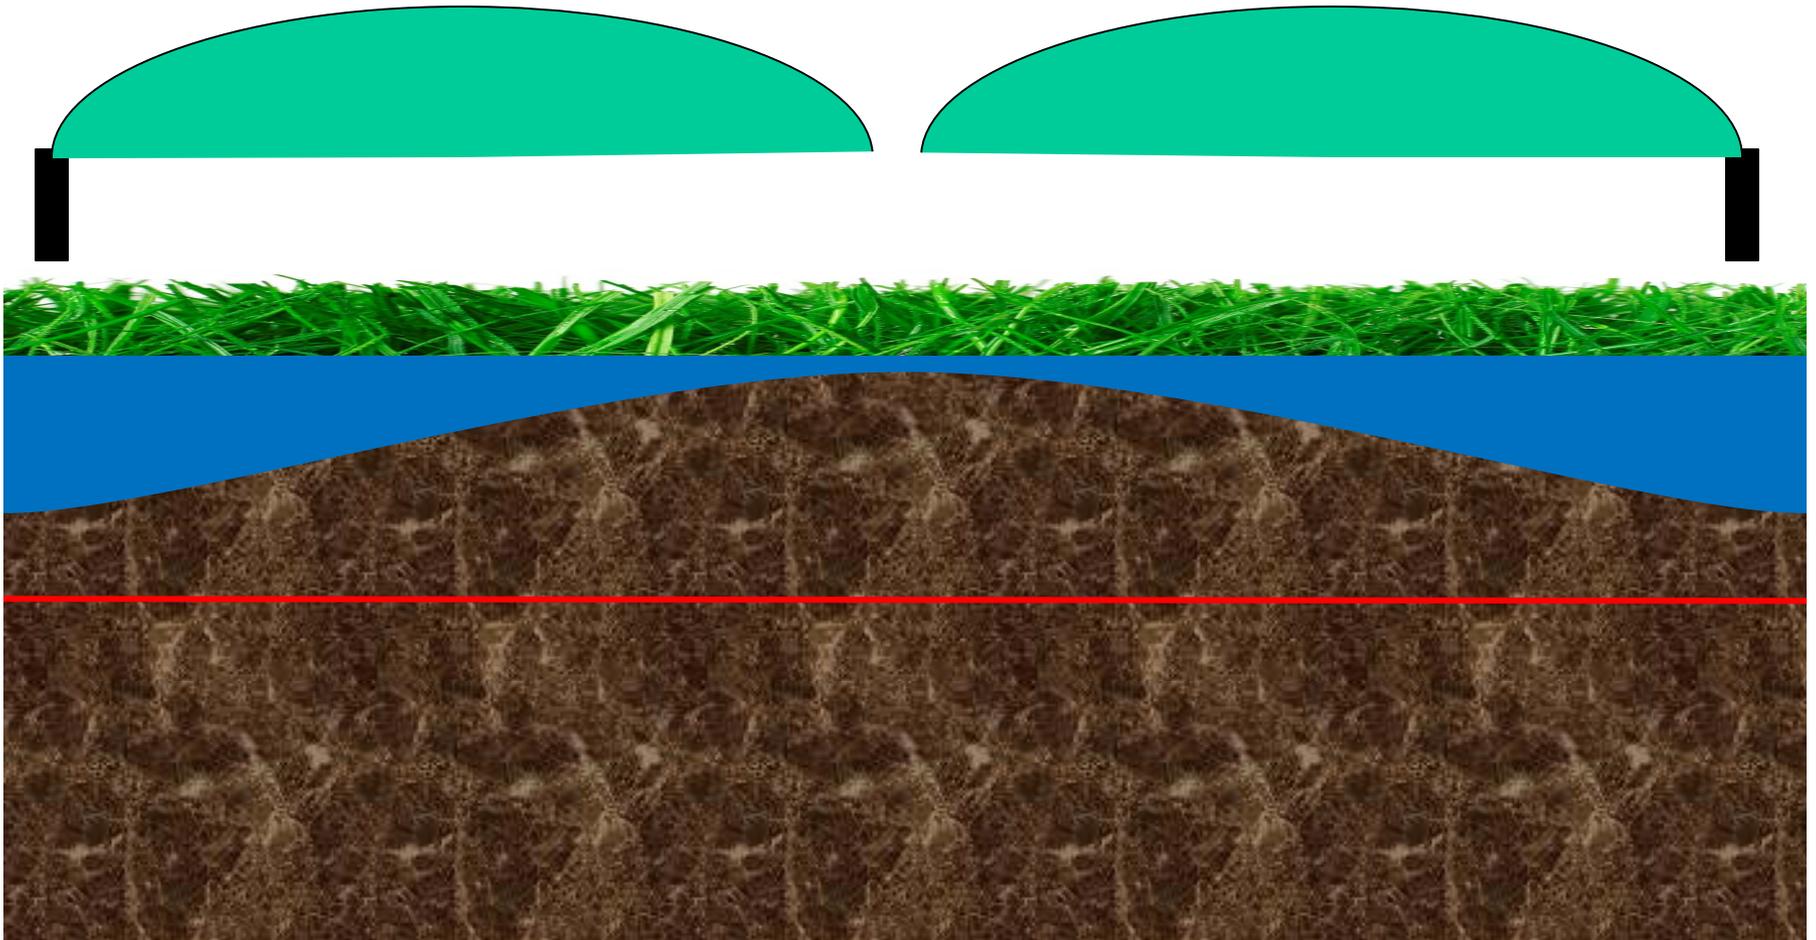


# Distribution Uniformity

- DU=Poor
- Duration: Longer

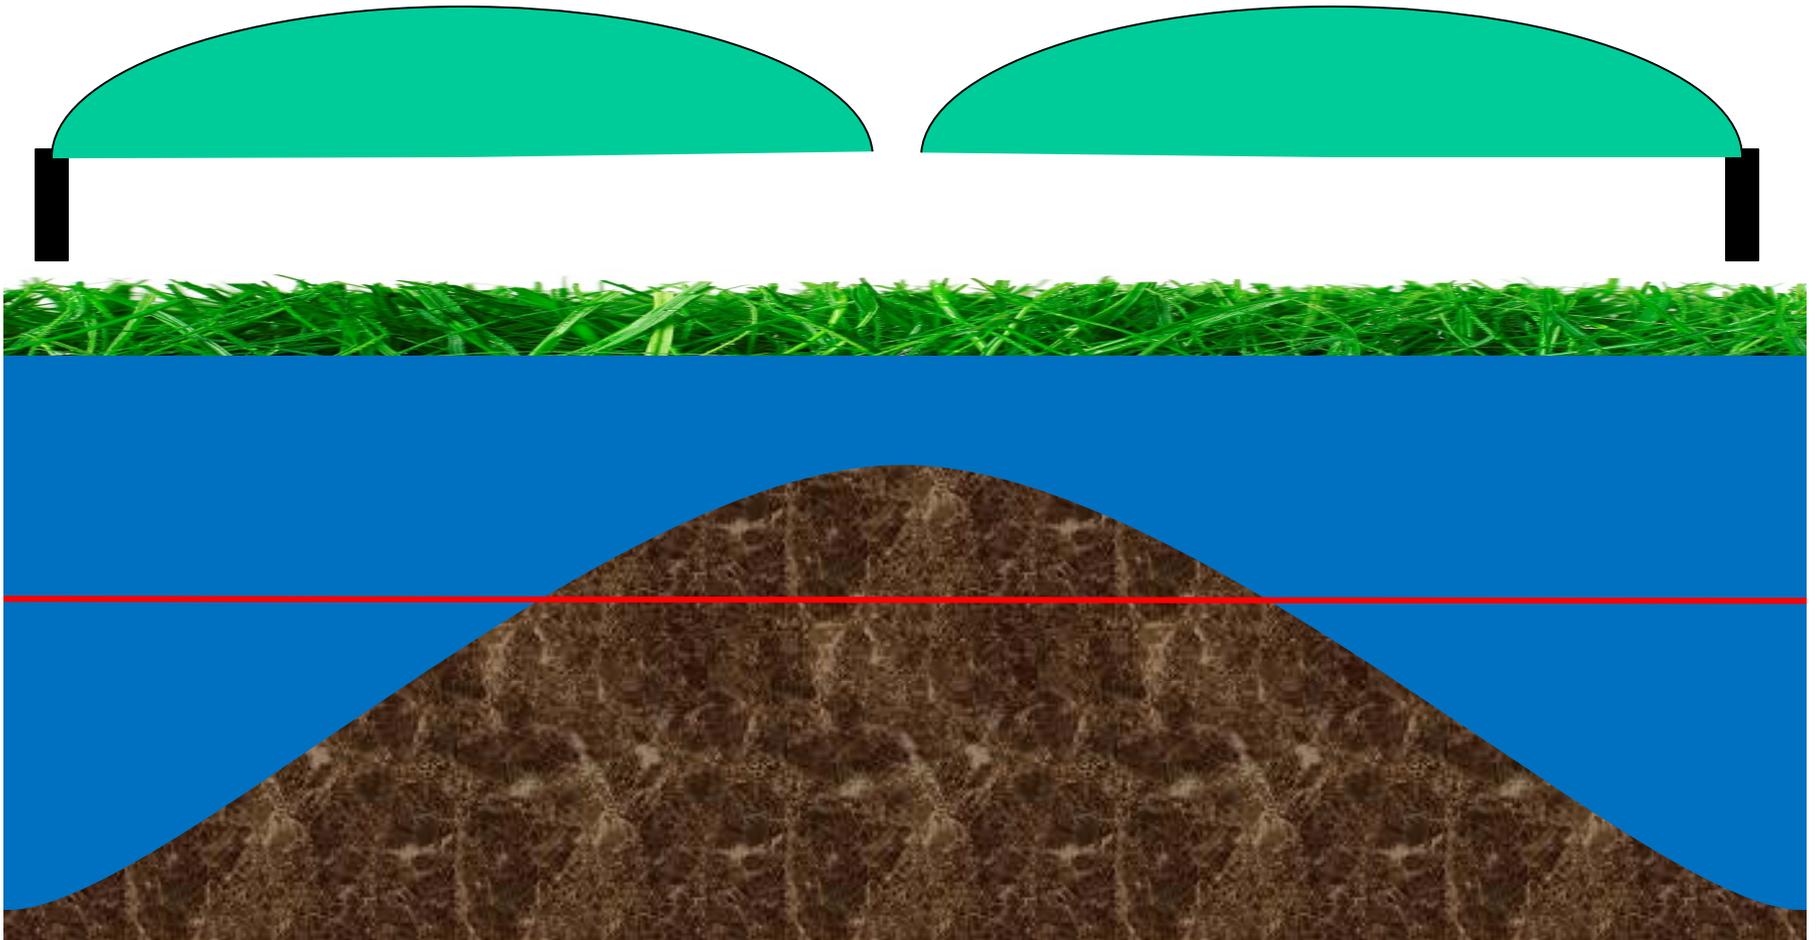

# Distribution Uniformity

- DU=Marginal
- Duration: Replace ET

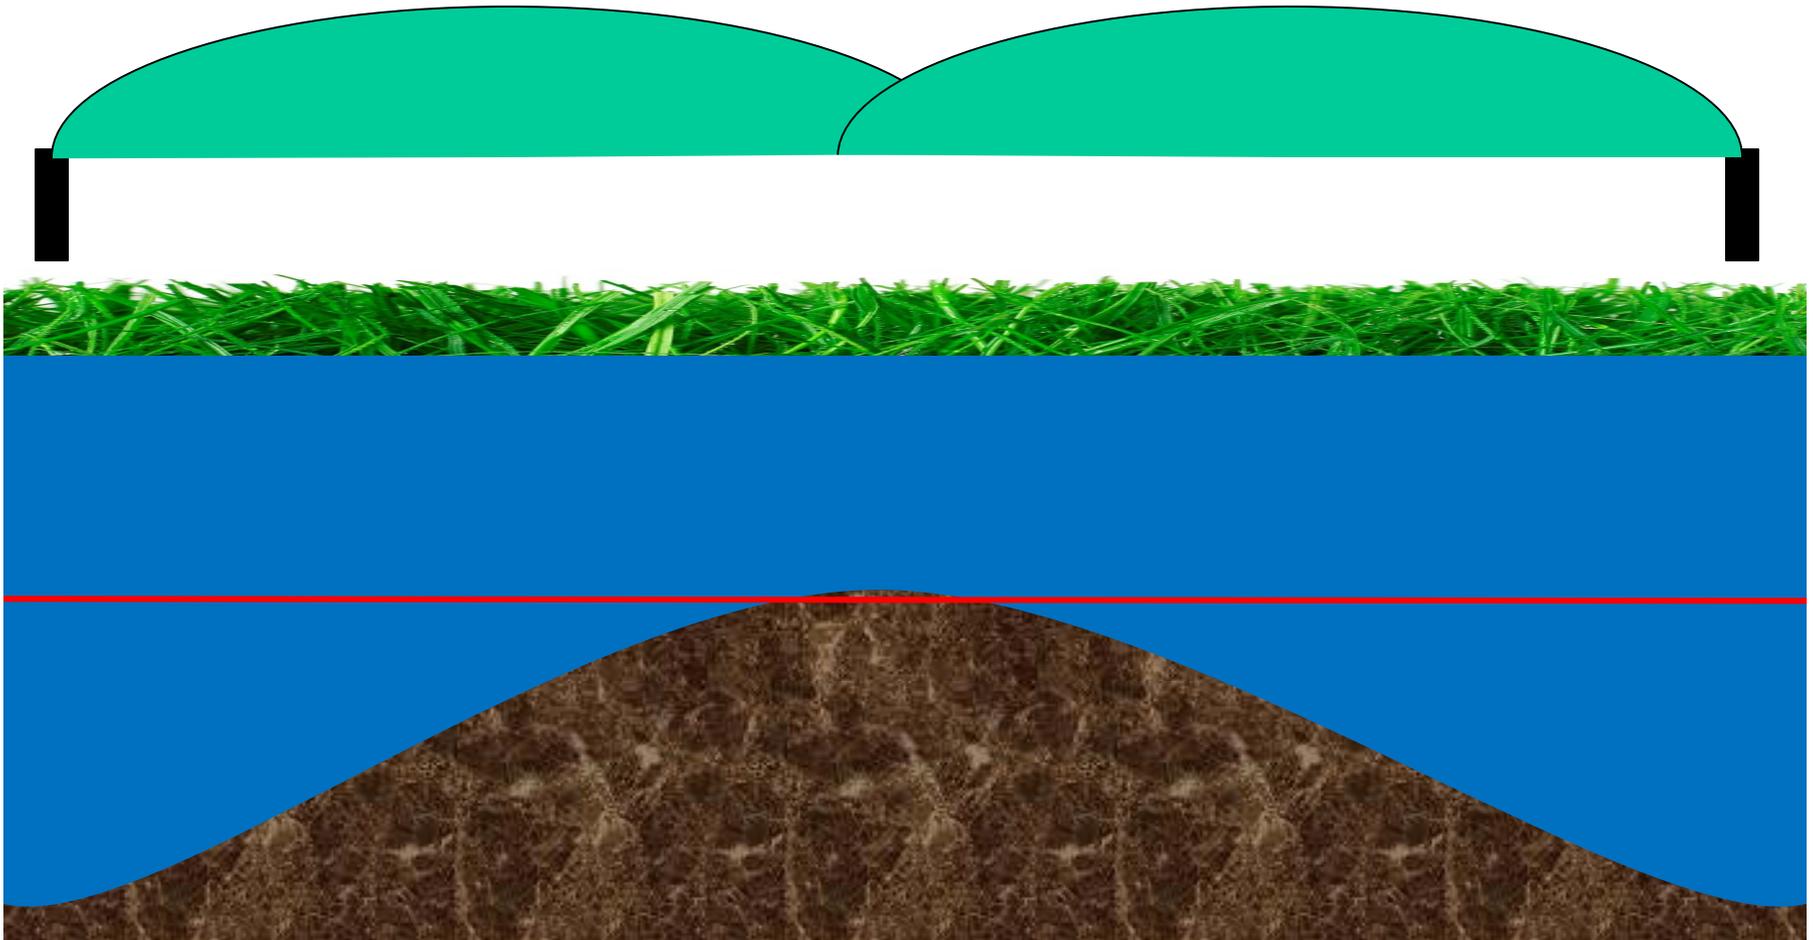

# Distribution Uniformity

- Calculating DU
  - Average of all ( $Avg_T$ )
  - Rank volumes
  - Average of bottom  $\frac{1}{4}$  ( $Avg_{LQ}$ )
  - $DU = Avg_{LQ} \div Avg_T$
- Target
  - Minimum 70%

| mL        | rank | LowQ            |
|-----------|------|-----------------|
| 36        | 11   |                 |
| 29        | 9    |                 |
| 18        | 3    | 18              |
| 19        | 4    |                 |
| 26        | 8    |                 |
| 33        | 10   |                 |
| 16        | 2    | 16              |
| 22        | 5    |                 |
| 38        | 12   |                 |
| 22        | 6    |                 |
| 14        | 1    | 14              |
| 21        | 7    |                 |
| $Avg_T =$ | 24.5 | $Avg_{LQ} =$ 16 |

$$DU = \frac{Avg_{LQ}}{Avg_T} = \frac{16}{24.5} = 65\%$$

# Improving DU

- Managing water pressure
- Effect on spray pattern



12' fixed 30 psi



# Improving DU

- Know the pressure recommended for your sprinklers
- This one is rated for 50 to 90 psi

**7005 Nozzle Performance** ■ ▲

| <i>Pressure<br/>psi</i> | <i>Nozzle</i> | <i>Radius<br/>ft.</i> | <i>Flow<br/>GPM</i> | <i>Precip<br/>In/h</i> | <i>Precip<br/>In/h</i> |
|-------------------------|---------------|-----------------------|---------------------|------------------------|------------------------|
| <b>50</b>               | 04            | 39                    | 3.8                 | 0.48                   | 0.56                   |
|                         | 06            | 45                    | 5.6                 | 0.53                   | 0.62                   |
|                         | 08            | 49                    | 6.6                 | 0.53                   | 0.61                   |
|                         | 10            | 53                    | 9.3                 | 0.64                   | 0.74                   |
|                         | 12            | 57                    | 11.1                | 0.66                   | 0.76                   |
|                         | 14            | 59                    | 12.6                | 0.70                   | 0.81                   |
|                         | 16            | 61                    | 14.3                | 0.74                   | 0.85                   |
|                         | 18            | 63                    | 16.1                | 0.78                   | 0.90                   |
|                         | <b>60</b>     | 04                    | 39                  | 3.8                    | 0.48                   |
| 06                      |               | 45                    | 6.1                 | 0.58                   | 0.67                   |
| 08                      |               | 49                    | 8.4                 | 0.67                   | 0.78                   |
| 10                      |               | 53                    | 10.1                | 0.69                   | 0.80                   |
| 12                      |               | 59                    | 12.0                | 0.66                   | 0.77                   |
| 14                      |               | 61                    | 14.3                | 0.74                   | 0.85                   |
| 16                      |               | 65                    | 15.9                | 0.72                   | 0.84                   |
| 18                      |               | 65                    | 17.8                | 0.81                   | 0.94                   |

# Improving DU



**7005 Nozzle Performance**

| <b>Pressure<br/>psi</b> | <b>Nozzle</b> | <b>Radius<br/>ft.</b> | <b>Flow<br/>GPM</b> | <b>Precip<br/>In/h</b> | <b>Precip<br/>In/h</b> |
|-------------------------|---------------|-----------------------|---------------------|------------------------|------------------------|
| <b>50</b>               | 04            | 39                    | 3.8                 | 0.48                   | 0.56                   |
|                         | 06            | 45                    | 5.6                 | 0.53                   | 0.62                   |
|                         | 08            | 49                    | 6.6                 | 0.53                   | 0.61                   |
|                         | 10            | 53                    | 9.3                 | 0.64                   | 0.74                   |
|                         | 12            | 57                    | 11.1                | 0.66                   | 0.76                   |
|                         | 14            | 59                    | 12.6                | 0.70                   | 0.81                   |
|                         | 16            | 61                    | 14.3                | 0.74                   | 0.85                   |
|                         | 18            | 63                    | 16.1                | 0.78                   | 0.90                   |
|                         | <b>60</b>     | 04                    | 39                  | 3.8                    | 0.48                   |
| 06                      |               | 45                    | 6.1                 | 0.58                   | 0.67                   |
| 08                      |               | 49                    | 8.4                 | 0.67                   | 0.78                   |
| 10                      |               | 53                    | 10.1                | 0.69                   | 0.80                   |
| 12                      |               | 59                    | 12.0                | 0.66                   | 0.77                   |
| 14                      |               | 61                    | 14.3                | 0.74                   | 0.85                   |
| 16                      |               | 65                    | 15.9                | 0.72                   | 0.84                   |
| 18                      |               | 65                    | 17.8                | 0.81                   | 0.94                   |

# Improving DU

- Know the pressure recommended for your sprinklers
- This one is rated for 30 to 55 psi and does best at 40 psi

**MP ROTATOR PERFORMANCE DATA**

**MP1000**  
 Radius: 8' to 15'  
 Adjustable Arc & Full Circle  
 Maroon: 90° to 210°  
 Lt. Blue: 210° to 270°  
 Olive: 360°

| Arc  | Pressure<br>PSI | Radius<br>ft | Flow        |             | Precip in/hr |             |
|--|-----------------|--------------|-------------|-------------|--------------|-------------|
|  |                 |              | GPM         | GPH         | ■            | ▲           |
| 90°<br>    | 25              | ...          | ...         | ...         | ...          | ...         |
|  | 30              | 12           | 0.16        | 9.6         | 0.43         | 0.50        |
|  | 35              | 13           | 0.18        | 10.8        | 0.40         | 0.46        |
|  | <b>40</b>       | <b>14</b>    | <b>0.19</b> | <b>11.4</b> | <b>0.39</b>  | <b>0.45</b> |
|  | 45              | 14           | 0.20        | 12.0        | 0.39         | 0.45        |
|  | 50              | 14           | 0.21        | 12.6        | 0.38         | 0.43        |
|  | 55              | 15           | 0.22        | 13.2        | 0.37         | 0.43        |
| 180°<br> | 25              | ...          | ...         | ...         | ...          | ...         |
|  | 30              | 12           | 0.32        | 19.2        | 0.43         | 0.50        |
|  | 35              | 13           | 0.35        | 21.0        | 0.40         | 0.46        |
|  | <b>40</b>       | <b>14</b>    | <b>0.37</b> | <b>22.2</b> | <b>0.39</b>  | <b>0.45</b> |
|  | 45              | 14           | 0.40        | 24.0        | 0.39         | 0.45        |
|  | 50              | 14           | 0.41        | 24.6        | 0.38         | 0.43        |
|  | 55              | 15           | 0.43        | 25.8        | 0.37         | 0.43        |

# Improving DU

- Upgrade sprinklers if possible
- At three study sites upgrades resulted in DU increases of 21%, 24%, and 18%



Photo: B. Baker

# Irrigation Management

- Know your system
- Precipitation and infiltration rates
- Distribution uniformity
- Water pressure

# Irrigation Scheduling Determining Distribution Uniformity

- If irrigating large turf areas, may be:
  - Largest impact for least effort
  - Low cost
- Obtain Water/Irrigation Audit Kit





**Thank you**  
**[lroki@ucdavis.edu](mailto:lroki@ucdavis.edu)**