

Getting the Most From Your Irrigation System



Larry Schwankl
UC Cooperative Extension
(559) 646-6569

ljschwankl@ucanr.edu

Powerpoint at: <http://ucanr.edu/schwankl>




Flood Irrigation Systems:

- Not a lot can be done to improve them, but here are two ideas:



Flood Irrigation Systems:

- Not a lot can be done to improve them, but here are two ideas:
 - **Monitor the soil moisture (and ideally the trees) to see if you can go longer between irrigations.**

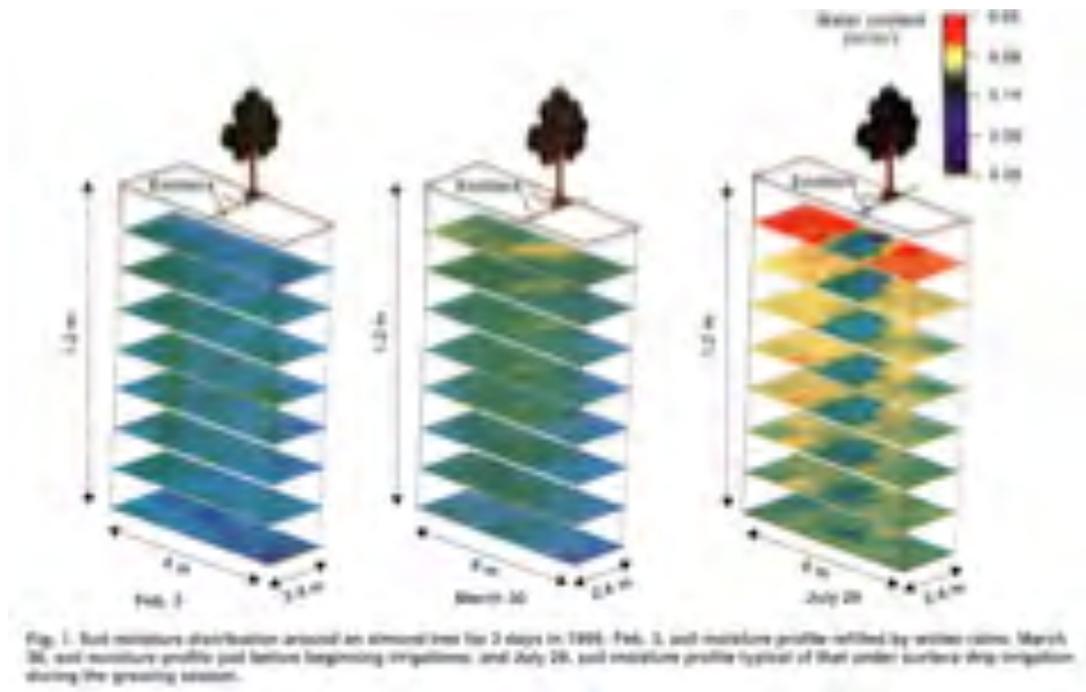

Flood Irrigation Systems:

- Not a lot can be done to improve them, but here are two ideas:
 - Monitor the soil moisture (and ideally the trees) to see if you can go longer between irrigations.
 - **Don't flood the entire middles. Use furrows pulled along the tree rows.**



Sprinkler Irrigation Systems:

- How can we improve their performance?



Sprinkler Irrigation Systems:

- **How can we improve their performance?**
 - **Know the application rate.**
 - **We provide water use information in units of “inches of water use per day (or per week.....)”.**
 - **Need to know the system application rate (in/hr) in order to know how long to run the system.**



Sprinkler Irrigation Systems:

- How can we improve their performance?
 - Know the application rate.

$$\text{Application Rate } \left(\frac{\text{in}}{\text{hr}} \right) = \frac{96.3 \times (\text{nozzle discharge in gpm})}{\text{Spacing along lateral (ft)} \times \text{Spacing between laterals (ft)}}$$

Sprinkler Application Rate:

Table 2. Sprinkler discharge rates (gpm) for various nozzle sizes (in) and pressures (psi)

Pressure (psi)	Nozzle size (in)										
	$\frac{3}{32}$	$\frac{7}{64}$	$\frac{1}{8}$	$\frac{9}{64}$	$\frac{5}{32}$	$\frac{11}{64}$	$\frac{3}{16}$	$\frac{13}{64}$	$\frac{7}{32}$	$\frac{15}{64}$	$\frac{1}{4}$
20	1.17	1.60	2.09	2.65	3.26	3.92	4.69	5.51	6.37	7.32	8.34
25	1.31	1.78	2.34	2.96	3.64	4.38	5.25	6.16	7.13	8.19	9.32
30	1.44	1.95	2.56	3.26	4.01	4.83	5.75	6.80	7.86	8.97	10.21
35	1.55	2.11	2.77	3.50	4.31	5.18	6.21	7.30	8.43	9.69	11.03
40	1.66	2.26	2.96	3.74	4.61	5.54	6.64	7.80	9.02	10.35	11.79
45	1.76	2.39	3.13	3.99	4.91	5.91	7.03	8.30	9.60	10.99	12.50
50	1.85	2.52	3.30	4.18	5.15	6.19	7.41	8.71	10.10	11.58	13.18
55	1.94	2.64	3.46	4.37	5.39	6.48	7.77	9.12	10.50	12.15	13.82
60	2.03	2.76	3.62	4.50	5.65	6.80	8.12	9.56	11.05	12.68	14.44
65	2.11	2.88	3.77	4.76	5.87	7.06	8.45	9.92	11.45	13.21	15.03
70	2.19	2.99	3.91	4.96	6.10	7.34	8.78	10.32	11.95	13.70	15.59
75	2.27	3.09	4.05	5.12	6.30	7.58	9.08	10.66	12.32	14.19	16.14

Note: Metric conversions: 1 gal = 3.785 l; 1 in = 2.54 cm; 1 psi = 6.89 kPa

Sprinkler Nozzle Size:



Sprinkler Application Rate



Pitot Tube & Pressure Gauge



Sprinkler Application Rate:

Table 2. Sprinkler discharge rates (gpm) for various nozzle sizes (in) and pressures (psi)

Pressure (psi)	Nozzle size (in)										
	3/32	7/64	1/8	9/64	5/32	11/64	3/16	13/64	7/32	15/64	1/4
20	1.17	1.60	2.09	2.65	3.26	3.92	4.69	5.51	6.37	7.32	8.34
25	1.31	1.78	2.34	2.96	3.64	4.38	5.25	6.16	7.13	8.19	9.32
30	1.44	1.95	2.56	3.26	4.01	4.83	5.75	6.80	7.86	8.97	10.21
35	1.55	2.11	2.77	3.50	4.31	5.18	6.21	7.30	8.43	9.69	11.03
40	1.66	2.26	2.96	3.74	4.61	5.54	6.64	7.80	9.02	10.35	11.79
45	1.76	2.39	3.13	3.99	4.91	5.91	7.03	8.30	9.60	10.99	12.50
50	1.85	2.52	3.30	4.18	5.15	6.19	7.41	8.71	10.10	11.58	13.18
55	1.94	2.64	3.46	4.37	5.39	6.48	7.77	9.12	10.50	12.15	13.82
60	2.03	2.76	3.62	4.50	5.65	6.80	8.12	9.56	11.05	12.68	14.44
65	2.11	2.88	3.77	4.76	5.87	7.06	8.45	9.92	11.45	13.21	15.03
70	2.19	2.99	3.91	4.96	6.10	7.34	8.78	10.32	11.95	13.70	15.59
75	2.27	3.09	4.05	5.12	6.30	7.58	9.08	10.66	12.32	14.19	16.14

Note: Metric conversions: 1 gal = 3.785 l; 1 in = 2.54 cm; 1 psi = 6.89 kPa

$$\text{Application Rate} \left(\frac{\text{in}}{\text{hr}} \right) = \frac{96.3 \times (\text{nozzle discharge in gpm})}{\text{Spacing along lateral (ft)} \times \text{Spacing between laterals (ft)}}$$

Sprinkler Application Rate:

R10 Plate/Nozzle Options and Flow Performance in GPM and LPH

Plate Series	Plate Options	Recommended Nozzles	PSI						BAR						
			25	30	35	40	45	50	1.75	2	2.25	2.5	2.75	3	3.25
P2	P2 9° Red Radius 18-20' (5.5-6.1 m) Stream Ht. 14-23" (36-58 cm) 	 Lt. Blue #40	—	—	.28	.30	.32	.34	—	—	61.4	64.7	68.0	71.3	74.6
		 Lt. Purple #45	.29	.32	.35	.37	.39	.42	66.4	71.3	76.3	80.6	83.9	87.2	91.5
		 Dk. Green #50	.36	.39	.43	.46	.48	.51	82.3	87.2	93.4	99.4	104	108	112
		.35 10FC	Within the recommended pressure range of 25-50 PSI (1.75-3.25 BAR), the .35 10 FC flow control nozzle is flow regulating within a flow range of no more than 0% greater and 10% less than the nominal flow of .35 GPM (79.5 LPH).												
P4	P4 9° White Radius 18-22' (5.5-6.7 m) Stream Ht. 14-24" (36-61 cm) P4 15° Orange Radius: 23-25' (7.0-7.6 m) Stream Ht. 40-50" (102-127 cm) 	 Dk. Green #50	—	—	.43	.46	.48	.51	—	—	93.4	99.4	104	108	112
		 Lt. Yellow #55	.44	.48	.52	.55	.59	.62	101	107	114	120	125	131	137
		 Lt. Red #60	.51	.56	.61	.65	.69	.73	117	125	133	141	147	154	161
		.50 10FC	Within the recommended pressure range of pressure range of 25-50 PSI (1.75-3.25 BAR), the .5 10 FC flow control nozzle is flow regulating within a flow range of no more than 0% greater and 10% less than the nominal flow of .5 GPM (114 LPH).												

$$\text{Application Rate} \left(\frac{\text{in}}{\text{hr}} \right) = \frac{96.3 \times (\text{nozzle discharge in gpm})}{\text{Spacing along lateral (ft)} \times \text{Spacing between laterals (ft)}}$$

Sprinkler Application Rate



$$\text{Application Rate} \left(\frac{\text{in}}{\text{hr}} \right) = \frac{96.3 \times (\text{nozzle discharge in gpm})}{\text{Spacing along lateral (ft)} \times \text{Spacing between laterals (ft)}}$$

Sprinkler Irrigation Systems:

- **How can we improve their performance?**
 - Know the application rate.
 - Determine and improve (if needed) the application uniformity.



Sprinkler Irrigation Systems:

- Measuring sprinkler application uniformity
 - *Tells you how evenly the water is applied.*



Sprinkler Irrigation Systems:

- Measuring sprinkler application uniformity

Hire Someone to Do It For You.



Sprinkler Irrigation Systems:



**UNIVERSITY OF
CALIFORNIA**

Division of Agriculture
and Natural Resources

<http://anrcatalog.ucdavis.edu>

REDUCING RUNOFF FROM IRRIGATED LANDS

PUBLICATION 8216

Soil Intake Rates and Application Rates in Sprinkler-Irrigated Orchards

LAWRENCE J. SCHWANKL, UC Cooperative Extension Irrigation Specialist; **TERRY L. PRICHARD**, UC Cooperative Extension Water Management Specialist; **BLAINE R. HANSON**, UC Cooperative Extension Irrigation and Drainage Specialist

INTRODUCTION

The California State Water Code requires anyone discharging waste that could affect the waters of the state to obtain a permit or coverage under a waiver. Agricultural runoff, whether from irrigation or rainfall, that leaves a property has been determined to likely contain waste (sediment, nutrients, chemicals, etc.).

Microirrigation Systems

- How can we improve them?



Microirrigation Systems

- How can we improve them?
 - Know the application rate and application uniformity.

UCCE-Schwankl

Orchard Irrigation Determining the Application Rate & Uniformity of a Microirrigation System

Larry Schwankl
UC Cooperative Extension
559-646-6569 e-mail: ljschwankl@ucanr.edu

Determining the application rate of microirrigation systems can be confusing because irrigation scheduling and tree water use information is usually presented in inches per day (in/day), while discharge from microirrigation emitters is measured in gallons per hour (gph). The following may be helpful in determining required operating times for microirrigation systems.

Available at <http://ucanr.edu/schwankl> along with the Powerpoint presentation

Microirrigation Systems

- Irrigation uniformity can be a problem with microirrigation systems too.

That means all the drippers or microsprinklers aren't discharging the same amount of water.





Microirrigation Systems

- Irrigation uniformity can be a problem with microirrigation systems too.
- **Why wouldn't it be uniform?**
 - Not a good irrigation system design – pressure differences too great.





Microirrigation Systems

- Irrigation uniformity can be a problem with microirrigation systems too.
- **Why wouldn't it be uniform?**
 - **Not a good irrigation system design – pressure differences too great.**

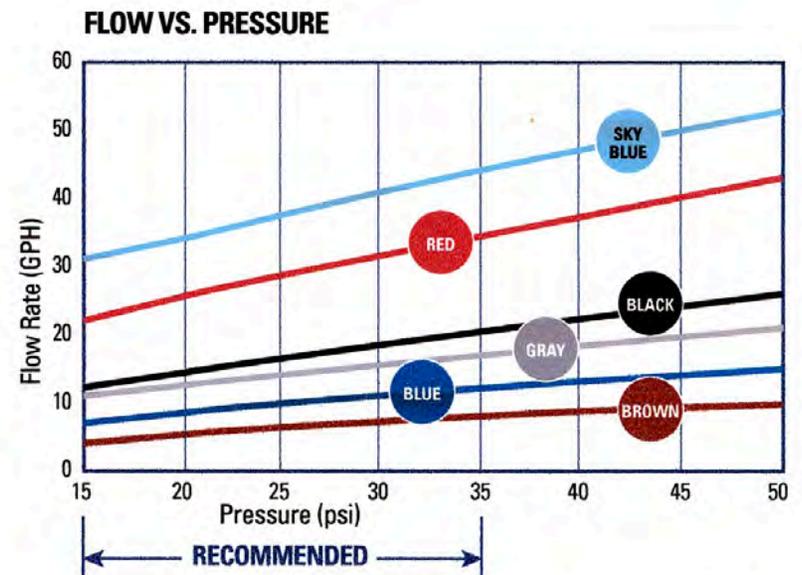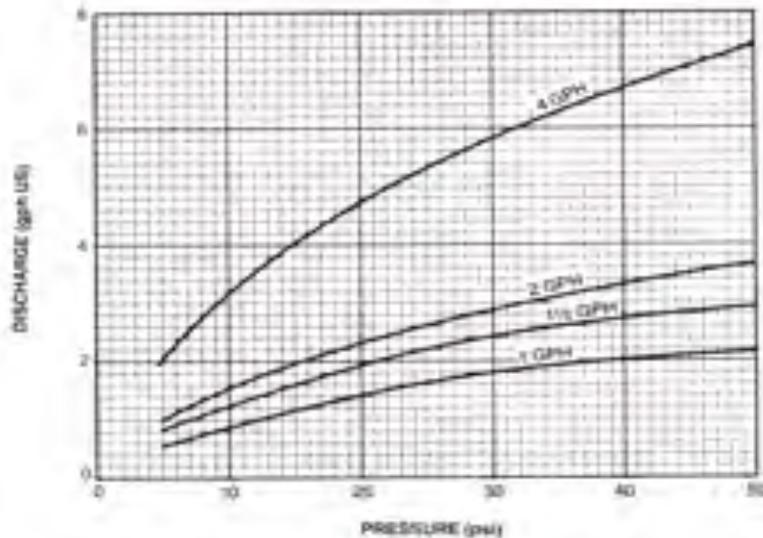

Microirrigation Systems

- Irrigation uniformity can be a problem with microirrigation systems too.
- Why wouldn't it be uniform?
 - Not a good irrigation system design – pressure differences too great. PC drippers or PC micros can help.

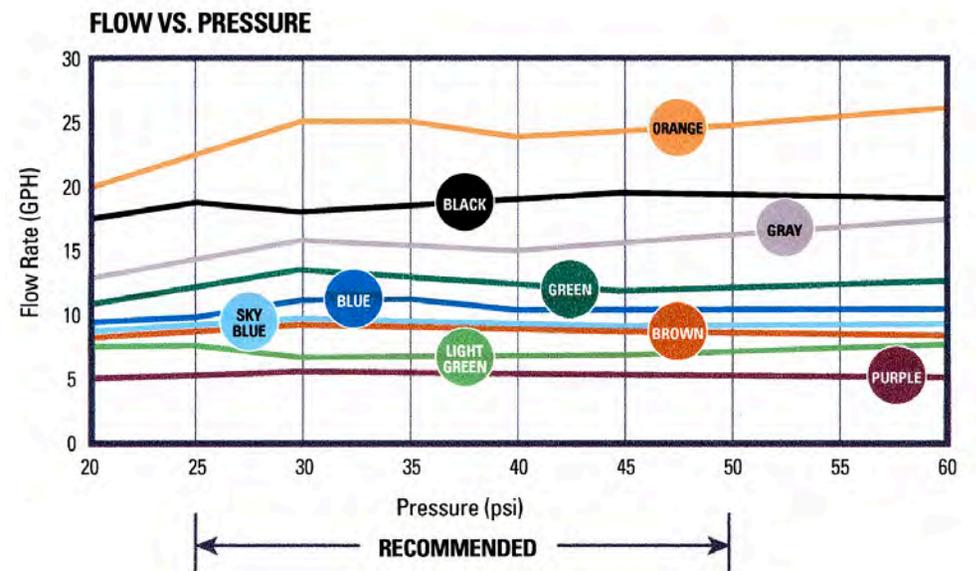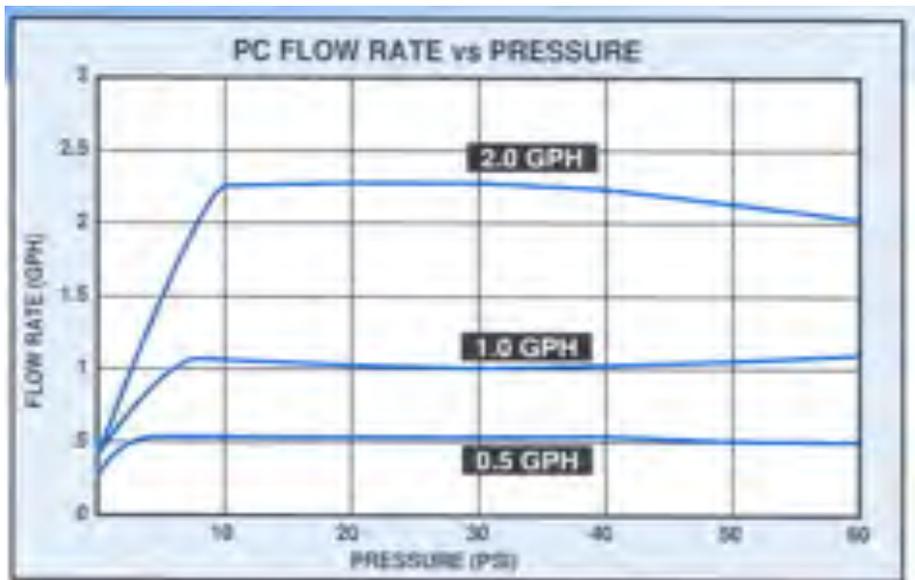

Microirrigation Systems

- Irrigation uniformity can be a problem with microirrigation systems too.
- Why wouldn't it be uniform?
 - Not a good irrigation system design – pressure differences too great.
 - Maintenance problems.
 - Clogging problems can lead to serious non-uniformity problems. Almost all clogging problems can be solved or prevented.



Clogging of Microirrigation Systems

Source: Physical Clogging

Clogging of Microirrigation Systems

Source: Physical Clogging - Particulates

Solution: Filtration



Filters:


- **Screen, disk, and sand media filters are all available.**

- **They can all filter to the same degree**

BUT


they req. different frequency of cleaning



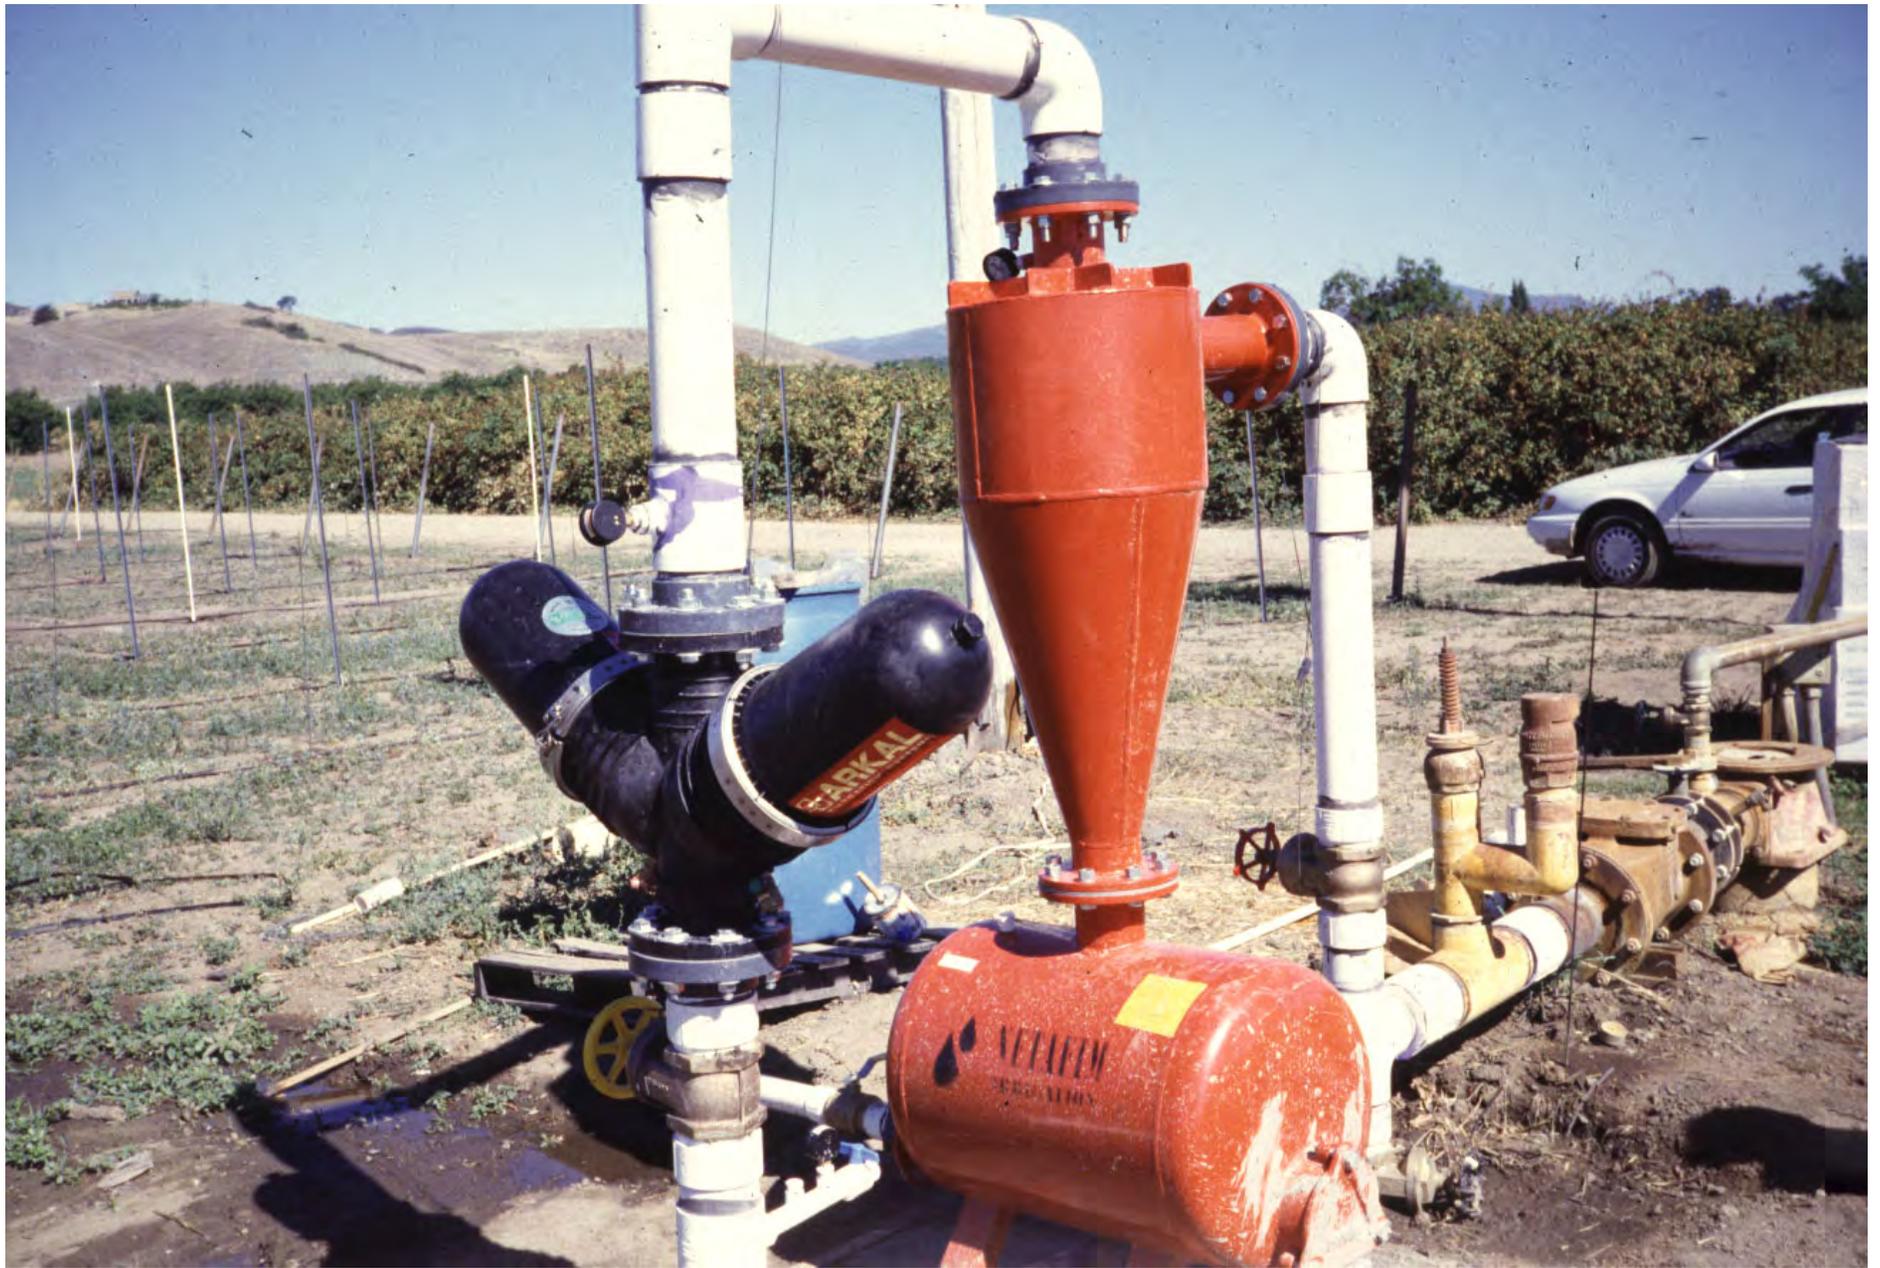





Backwash Process

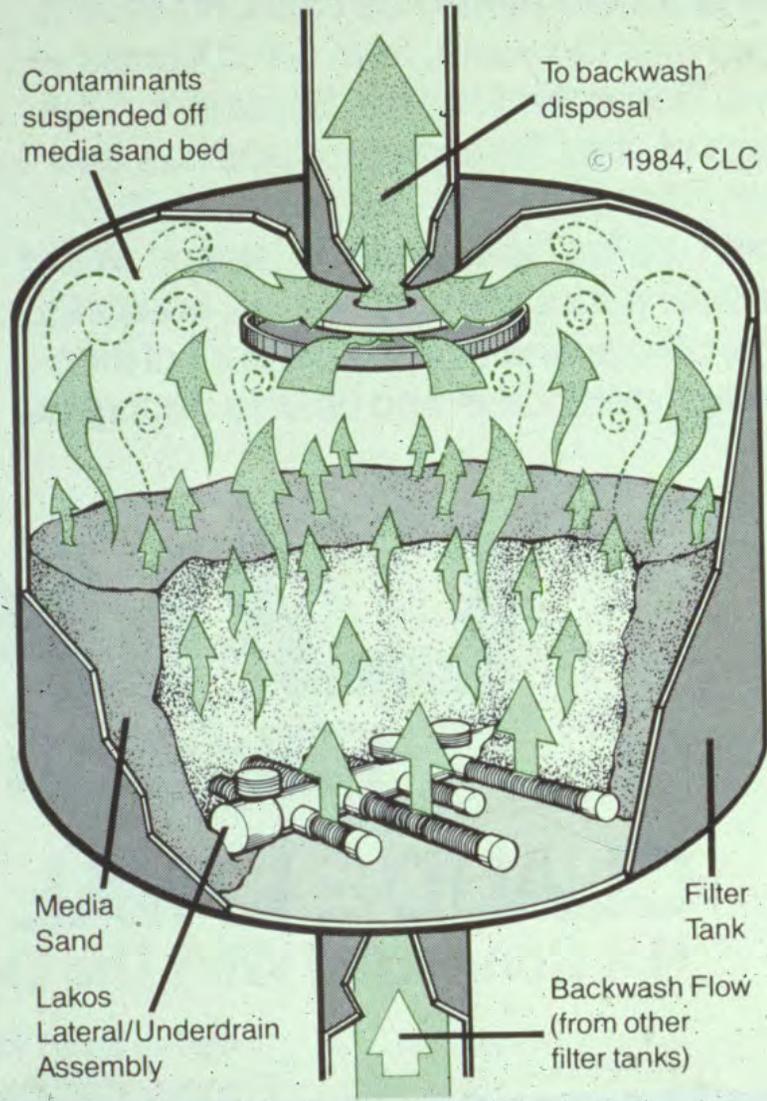

Filtering Process

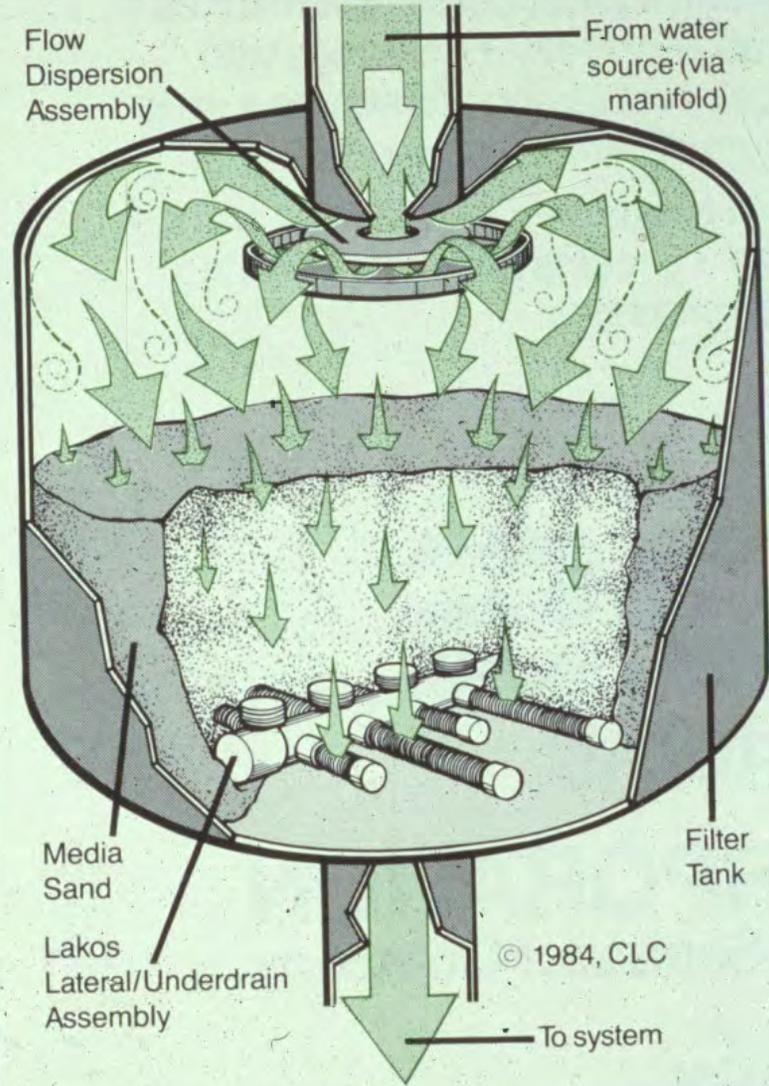

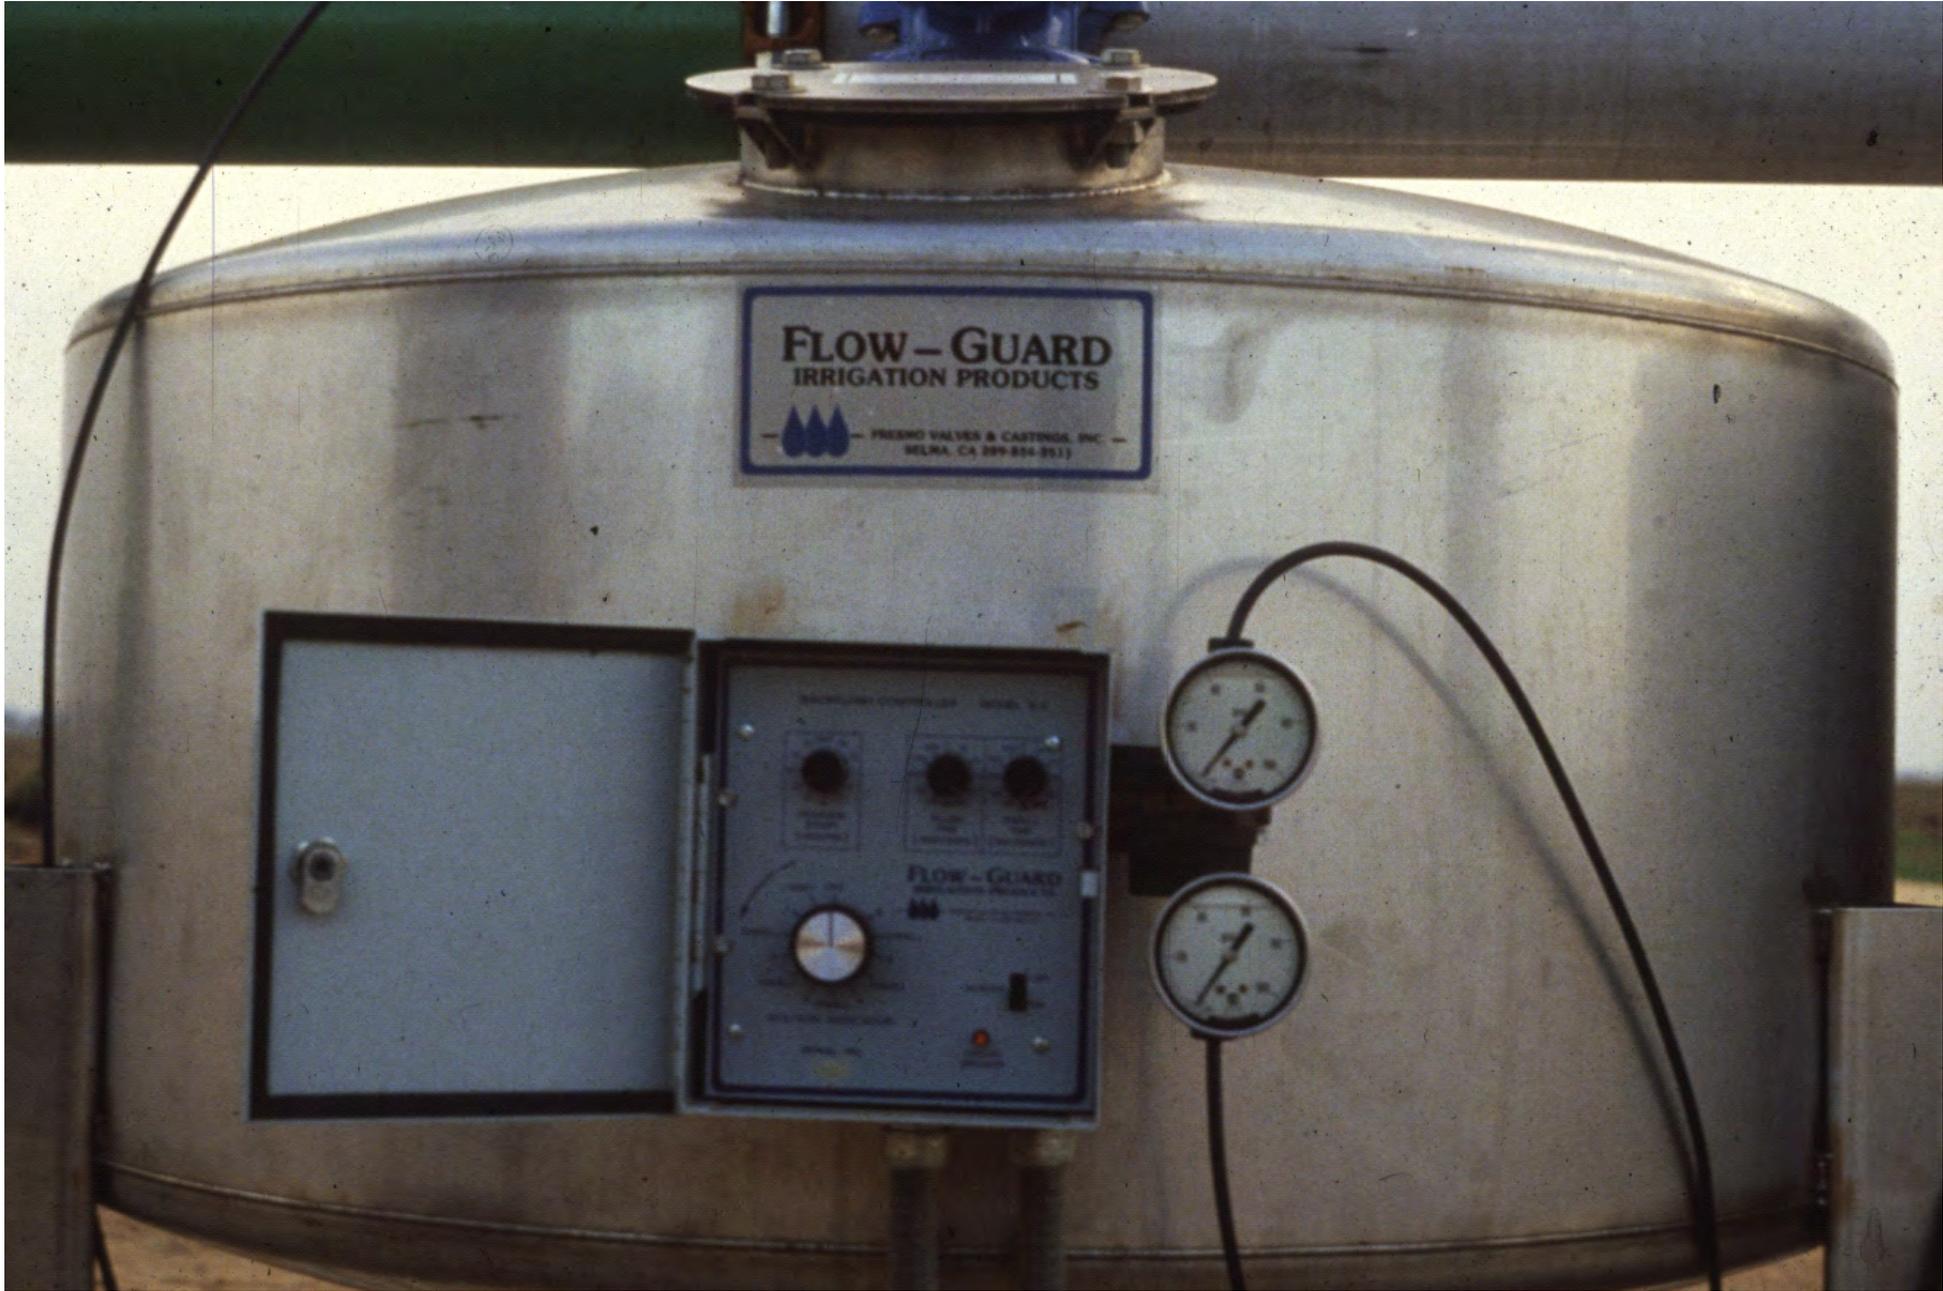

FLOW-GUARD
IRRIGATION PRODUCTS
PRESINO VALVES & CASTINGS, INC.
MELMA, CA 959-854-9511

FLOW-GUARD IRRIGATION PRODUCTS

MODEL V-1

Flow Control Panel with digital display and analog gauges.



Clogging of Microirrigation Systems

Source: Chemical Precipitates

- Lime (calcium carbonate) and iron are the most common problems.



Chemical Precipitate Clogging of Microirrigation Systems

Water quality levels of concern:

- **Calcium: pH > 7.5 and 2.0 meq/l (120 ppm) of bicarbonate**

- **Iron: pH > 4.0 and 0.5 ppm iron**

Clogging of Microirrigation Systems

Source: Lime

Solution: pH Control (Acidification)

+

filtration

Dealing with Iron Precipitation:

1. Precipitate iron in a pond / reservoir



Dealing with Iron Precipitation:

- 1. Precipitate iron in a pond / reservoir**
- 2. Chemicals (e.g. phosphonic acid, phosphonate) may keep iron in solution**

Clogging of Microirrigation Systems

Source: Biological Sources



Clogging of Microirrigation Systems

Source: Biological Sources

Solution: Filtration (usually media filters)

+

Biocide

Biological Clogging

Acid may deter
but not eliminate

biocide

chlorine copper

Chlorine

- Sources:
 - Liquid - sodium hypochlorite.
 - Solid - calcium hypochlorite.
 - Gas chlorine.



Chlorine as a Biocide

Free Chlorine

Prevent growth

1-2 ppm

Periodic treatment

10-20 ppm

Serious clogging cleanup

Test for chlorine using a pool / spa test kit

Chlorine: Injection Rates

■ Sodium hypochlorite (liquid)

- Example: household bleach w/ 5.25% active chlorine.

$$\text{Chlorine injection rate (gal/hr)} = \frac{\text{System flow rate (gpm)} \times \text{Desired Cl Conc. (ppm)} \times 0.006}{\text{Strength of Cl soln (\%)}}$$

■ Calcium hypochlorite (solid)

- 65-70% available chlorine.
- 12.8 lbs. of calcium hypochlorite added to 100 gallons of water forms a 1% solution.
- Use above formula.

Flushing of Microirrigation Systems:



Flushing

- **Silts and clay particles pass through even the best filters.**



Flushing

- Silts and clay particles pass through even the best filters.
- Need to flush the system - mainlines, submains, and laterals (in that order). Flush by hand or can use self-flushing end caps.





Maintenance of Microirrigation Systems

[Home](#)[Predicting clogging problems \(II\)](#)[Solutions to existing clogging problems \(III\)](#)[System evaluation for emission device clogging \(IV\)](#)[Routine maintenance tasks \(V\)](#)[Website Authors](#)

Maintenance of Microirrigation Systems

Predicting Clogging Problems

["What should I watch for?"](#)

Solutions to Existing Clogging Problems

["I Have a Clogging Problem and I Want to Solve It"](#)

System evaluation for emission device clogging

["How do I determine if I have a clogging problem?"](#)

Routine Maintenance Tasks

["What should I do to keep my microirrigation system running well?"](#)

Microirrigation systems include microsprinklers for tree crops, drip emitters for trees, vines, and some row crops, and drip tape for row and field crops. Microirrigation systems apply water to the soil through emitters that are installed along drip lines and contain very small flow passages. Microirrigation systems can apply water and fertilizers more uniformly than other irrigation methods. This uniformity results in potentially higher yields, higher revenue, and reduced irrigation operating costs.

Uniformity, a performance characteristic of irrigation systems, is a measure of the evenness of the applied water throughout the irrigation system. Distribution uniformity (DU), sometimes called emission uniformity (EU), is an index that describes how evenly or uniformly water is applied throughout the field. A uniformity of 100% means the same amount of water was applied everywhere. Unfortunately, all irrigation systems apply water at a uniformity of less than 100%, and thus some parts of a field receive more water than others. Field evaluations have shown that microirrigation systems have the potential for higher uniformity than other irrigation methods. However, clogging reduces the uniformity of applied water in microirrigation systems, thus increasing the relative differences in applied water throughout a field.

The small flow passages in the emitters and microsprinklers make microirrigation systems highly susceptible to clogging. Clogging reduces the uniformity of the applied water and decreases the amount of applied water. Clogging also decreases the amount of salt leaching around the lateral line in saline soils.

<http://micromaintain.ucanr.edu>

Maintaining Microirrigation Systems

Available at:

<http://anrcatalog.ucdavis.edu>



Larry Schwankl
Blaine Hanson
Terry Prichard



University of California
Agriculture and Natural Resources

Publication 21637

Funded by the Joseph G. Prosser Trust
Administered by the University of California
Water Resources Center



Stay on Top of Your Maintenance



Questions???

Larry Schwankl

559-646-6569

ljschwankl@ucanr.edu

Presentation available at: <http://ucanr.edu/schwankl>

Maintenance website: <http://micromaintain.ucanr.edu>